

OCCIM

FLR

RECTANGULAR FILTER



FLR

**RECTANGULAR
FILTER**



1


Ideal to be directly mounted on mechanical conveying means and on product storage bins.

Two versions are available, one having 12 sleeves and one having 24 sleeves made of needle felt, with a length of 1450 mm.

Sleeve cleaning is effected by low pressure air jet. A local timer sets the intensity and duration of air injection; air is directed to the injectors through a distributor controlled by a stepper motor.

Each unit is independent since it is equipped with a fan for air aspiration and with a blower for the cleaning of filtering sleeves.

The filter is equipped with a pressure gauge to detect the efficiency and cleaning status of the filtering sleeves.

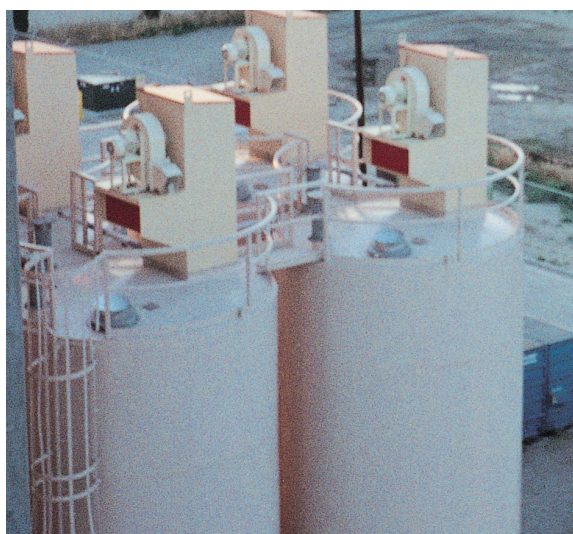

2

1. 2.

Rectangular filter directly installed on grains storage and finished products bins.

